



CerAnode Internal Tank Potable Water Anode

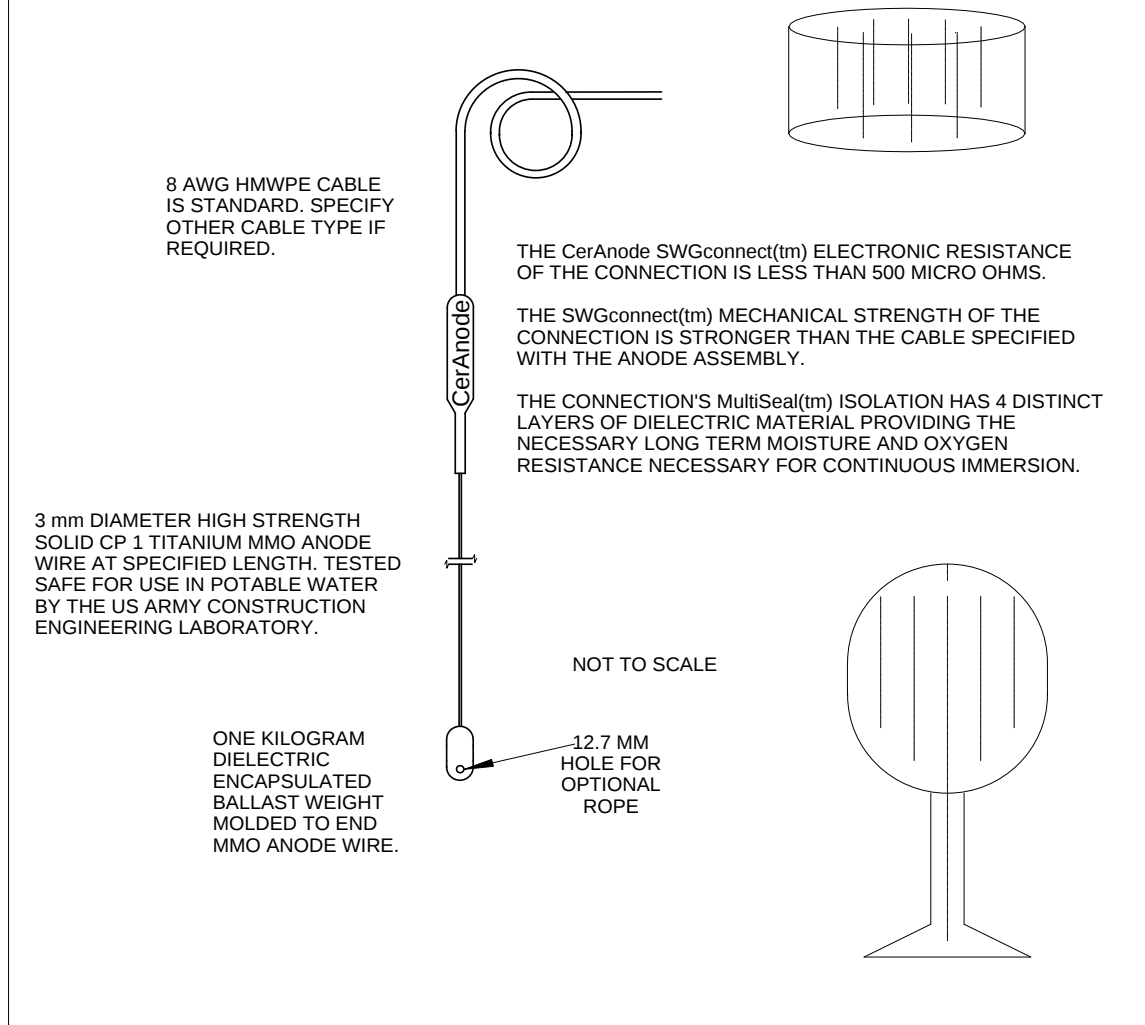

Internal Tank Anode for Water Storage Tanks

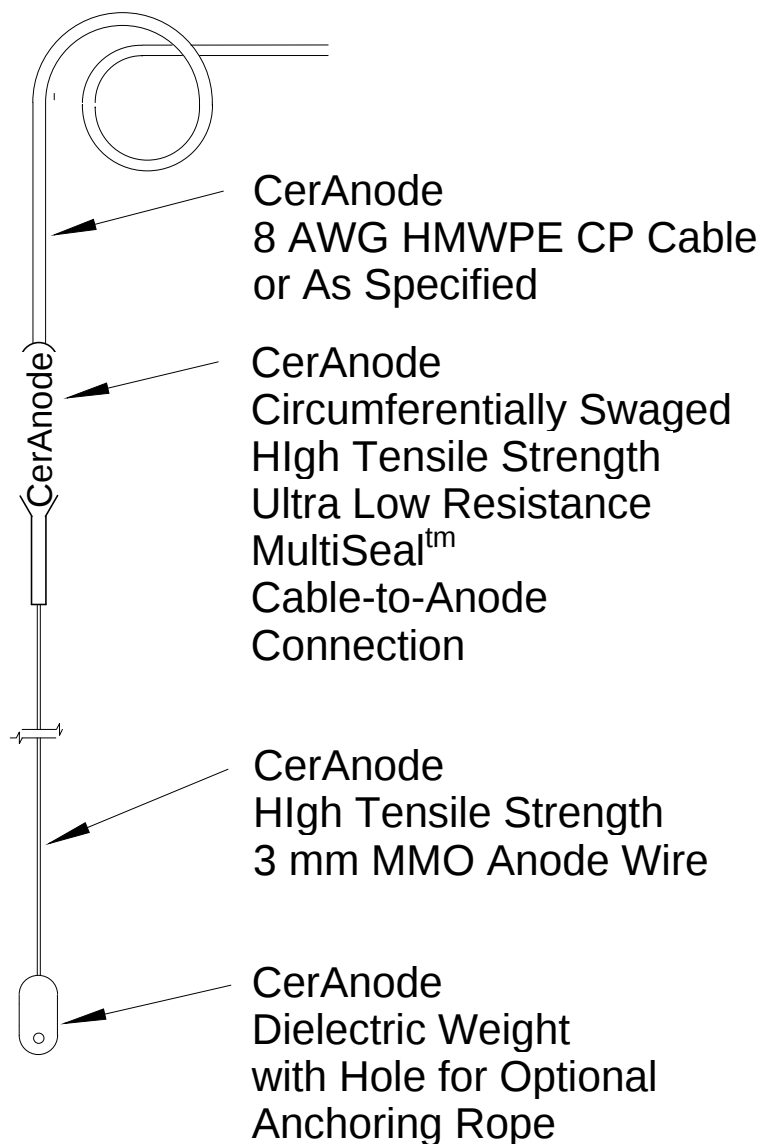

ANODE ASSEMBLY



CABLE – CONNECTION -- MMO ANODE WIRE – DIELECTRIC END WEIGHT

The Anode Assembly arrives on site in a coil as pictured, ready to lower into the tank.

ANODE WIRE

CerAnode 3mm Diameter Anode Wire with Design Life exceeding 20 Years
Commercially Pure Grade 1 Titanium
ASTM B863
CC-TIR-MMO Catalyst Iridium-Tantalum
CerAnode manufactures this MMO Anode Wire from the most corrosion resistant material known to man under our ISO 9001:2008 Registered Quality System.

MOUNTING HARDWARE



ANODE HANGER CLEVIS AND HAND HOLE COVER

One bolt secures the ANODE, CLEVIS and HAND HOLE COVER to the tank roof. The HAND HOLE COVER is easy to install. The corrosion resistant HAND HOLE COVER and thick heavy RUBBER GASKET provides assurance of many decades of uncompromised integrity and reliable service. Parts in picture are representative.

END WEIGHT



FULLY ENCAPSULATED DIELECTRIC STABILIZING END WEIGHT

The DIELECTRIC END WEIGHT is fully encapsulated and sealed against interference corrosion. This assures that the weight will be in tact well beyond the twenty year life of the anode wire itself.